


# Characteristics Summary

BOMBER.....B-25J

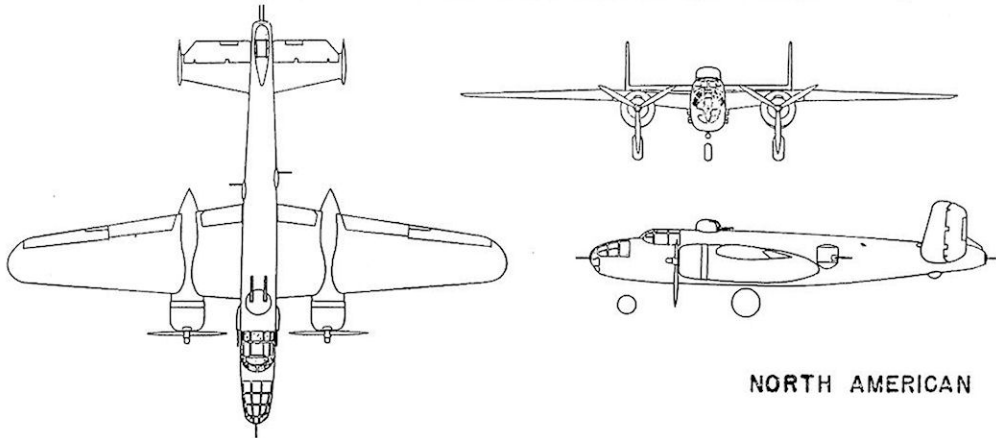

*limited data 3rd Ed.  
Add. No. 16, 10/54*

Wing area ..... 610 sq ft                      Length ..... 53.5 ft  
Span ..... 67.6 ft                                  Height ..... 16.3 ft


AVAILABILITY			PROCUREMENT			
Number available			Number to be delivered in fiscal years			
ACTIVE	RESERVE	TOTAL				

## STATUS

1. Design initiated: (B-25) February 1938
2. First acceptance: December 1943
3. Production completed: August 1945
4. Navy designation: PBJ-1J

POWER PLANT	FEATURES	ARMAMENT
(2) R-2600-13 or -29 Wright ENGINE RATINGS BHP - RPM - ALT T.O: 1700 - 2600* Mil: 1700 - 2600 - 4500 1450 - 2600 - 12,000 Nor: 1500 - 2400 - 6700 1350 - 2400 - 13,000 *2800 RPM for -29 engine	Crew: 6 Cabin Heating and Cooling Propeller Anti-icing Max Fuel Cap: 1624 gal	Turrets: 2 Guns: (12) .50 cal Ammunition: 4600 rds Max Bomb Load: *(8)500 lb Max Bomb Size: 2000 lb *Semi-Armor Piercing

*Characteristics Summary Basic Mission* ..... B-25J

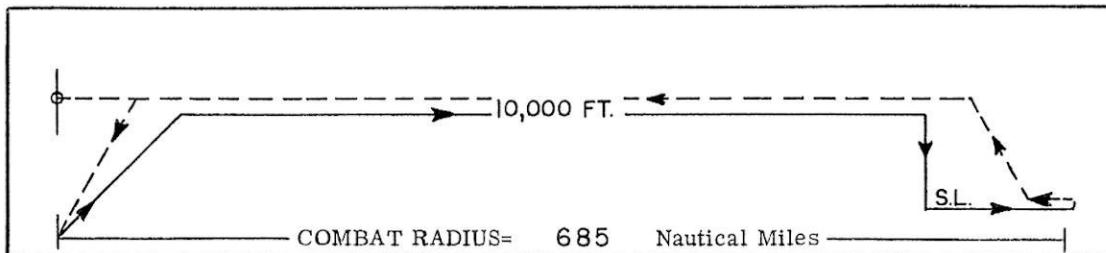

P E R F O R M A N C E		
COMBAT RADIUS	COMBAT RANGE	COMBAT SPEED
685 naut. mi with 4000 lb payload at 177 knots avg. in 7.98 hours.	1316 naut. mi with 4000 lb payload at 181 knots avg. in 7.54 hours.	245 knots at 10,000 ft alt, max power
		<b>MAXIMUM SPEED</b>
		255 <sup>(d)</sup> knots at 15,000 ft alt, nor power
C L I M B	C E I L I N G	T A K E - O F F
980 fpm sea level, take-off weight normal power	22,500 ft 100 fpm, take-off weight normal power	ground run 2940 ft   — ft no assist   assisted
1890 fpm sea level, combat weight maximum power	24,200 ft 500 fpm, combat weight maximum power	over 50 ft height 4200 ft   — ft no assist   assisted
L O A D	W E I G H T S	S T A L L I N G S P E E D
Bombs: 4000 lb Ammunition: 4600 rds/.50 cal	Empty..... 19,530 lb Combat... 27,400 lb Take - off 35,000 lb limited by performance	97 knots flaps down, take-off weight
Fuel: 1137 gal protected 100 % droppable 0 % external 0 %		<b>TIME TO CLIMB</b> —

**N O T E S**

1. PERFORMANCE BASIS:  
 (a) Flight test  
 (b) Fuel density: 6.0 lb/gal  
 (c) In computing Radius and Range, specific fuel consumptions have been increased 5% to allow for variation of fuel flow in service aircraft.  
 (d) Maximum speed is obtained at 15,000 feet using normal power.

2. REVISION BASIS: To show engine ratings and changes in "Status", "Features" and "Notes" blocks.