

In reply address not the signer of this letter, but "Commanding Officer, U. S. Naval Air Station, Anacostia, D. C."

U. S. NAVAL AIR STATION
ANACOSTIA, D. C.

Refer to No.

CONFIDENTIAL

VP4P-4/NA6
(PT) (223)
Ser. #42470

SEP 19 1942

From: Commanding Officer.
To : The Chief of the Bureau of Aeronautics.
Subject: Model P4P-4 Airplane - Miscellaneous Tests -
(Droppable Fuel Tanks; Performance at Military Power; Combat comparison.
Reference: (a) BuAer. Conf. ltr. Aer-B-211-24, C-75736, of 16 June 1942.
(b) SEU Conf. Report of June 22, 1942 (SEU 42-14/P, 1928).
Enclosure: (A) Model P4P-4 Airplane No. 02135 - Chart of Performance Characteristics, Military Power.
(B) Model P4P-4 Airplane No. 02135 - Plot of BRP Required vs. Airspeed in Various Conditions.

1. Model P4P-4 Airplane #02135 was made available for various miscellaneous tests between June 21, 1942 and August 19, 1942, including tests of droppable auxiliary wing tanks, comparison with the P-40F and P4P-4B, and a brief check of performance using the military power rating of the engine. These were practically complete when terminated by a cracked rear crankcase requiring engine replacement. The results are reported herewith.

2. The following comments apply to the auxiliary droppable tank installation:

(a) The fuel system operated satisfactorily on the auxiliary tanks, the electric fuel booster pump being required at altitude. The delay in picking up suction when transferring from main to auxiliary tanks varied from zero at

FOR DEFENSE



BUY
UNITED
STATES
SAVINGS
BONDS
AND STAMPS

CONFIDENTIAL

VP4F-4/EA6
(PT) (228)
Ser. #42470

SEP 19 1942

Subject: Model P4F-4 Airplane - Miscellaneous Tests -
(Droppable Fuel Tanks; Performance at
Military Power; Combat comparison.)

low altitudes up to 50 seconds at high altitude, but no failure occurred.

(b) The take-off, landing, control, and stability characteristics were satisfactory with either or both tanks installed, and at all combinations of fuel load.

(c) The tanks released satisfactorily on the ground and in flight after modification to the release mechanism. Special springs had to be fitted to cause the sway braces to drop off.

(d) One full tank and two empty tanks were released in flight. The action of the tank when released empty is rather erratic and there was considered to be some possibility of its striking the tail. Only a large number of releases will insure that this cannot occur, but as a precaution it is recommended that in this condition the release be made at moderately low speeds with power off.

(e) In order to determine the effect on drag, speed and fuel consumption, considerable data was obtained on power required at various airspeeds. The results are plotted in enclosure (B). The curve shown for power required as a normal six (6) gun fighter is considered to be more accurate than those previously available, and might be used in determining speeds for best range and endurance at other weights and altitudes. The data used in plotting similar curves with auxiliary tanks installed is less complete but is considered to be dependable.

3. The performance of the airplane (without auxiliary tanks) using the military power rating of the engine is shown in curves forming enclosure (A) and is tabulated as follows:

CONFIDENTIAL

VP4F-4/HA6
(PT)(228)
Ser.#42470

SEP 19 1942

Subject: Model P4F-4 Airplane - Miscellaneous Tests -
(Droppable Fuel Tanks; Performance at
Military Power; Combat comparison.)

Gross weight	7933	
Critical altitude for 1100 H.P.(ft)	17200	
Maximum Speed at airplane critical alti- tude (mph)	316	
Service ceiling (ft)	33100	
Rate of climb at sea level (ft/min)	1820	
Rate of climb at 16300 feet altitude (ft/min)	1500	
Take-off distance in a calm (ft)	675	
Take-off distance in a 25 knot wind (ft)	342	
Increase in indicated speed shifting from normal rating to military rating at 19000 feet altitude (knots)		2.5

4. The improvement in performance of the airplane at and above critical altitude with the use of the military rating appears to be very small. The carburetor air temperatures while operating in either auxiliary stage at the higher RPM are excessive and the engine was somewhat rough at maximum power. Operation at the military rating in neutral blower was satisfactory, and improved performance was apparent. It is concluded that the military rating is effective in neutral blower but is not justified in the high auxiliary blower setting. It is considered moderately effective in low auxiliary setting and satisfactory for short periods under cool conditions.

5. The P4F-4 was compared to the P4F-4B, carrying the same load, at various altitudes to determine relative climb, speeds, and turning ability. The gross weights were 7933 lbs. and 7694 lbs. respectively. The difference in performance was very small, the P4F-4B being slightly superior in speed and climb at low altitudes and the P4F-4 slightly superior at 15000 feet and above. There was no sensible difference in turning ability.

6. The P4F-4 was compared to the P-40F to determine relative climb, speed and turning ability. At the continuous engine ratings the P4F-4 is superior in climb, the

CONFIDENTIAL

WP4F-4/NA6

(FT)(228)

Ser. #42470

File

SEP 19 1942

Subject: Model P4F-4 Airplane - Miscellaneous Tests -
(Droppable Fuel Tanks; Performance at
Military Power; Combat comparison.)

superiority increasing with altitude, and is inferior in level speed below 20000 feet. At the maximum ratings the P-40Y is superior in climb below 18000 feet and in level speed below about 22000 feet. At higher altitudes the P4F-4 is superior in all respects. It is superior in turning ability at all altitudes, and in vision and general handling qualities.

W.V. SAUNDERS


Copies to: Bu. Aero. (4)

WWIIaircraftperformance.org

02135


MO. L F4F-4 AIRPLANE No. 135
PERFORMANCE CHARACTERISTICS - MILITARY POWER
6 GUN FIGHTER GROSS WEIGHT = 7933 LBS.

AN-60652

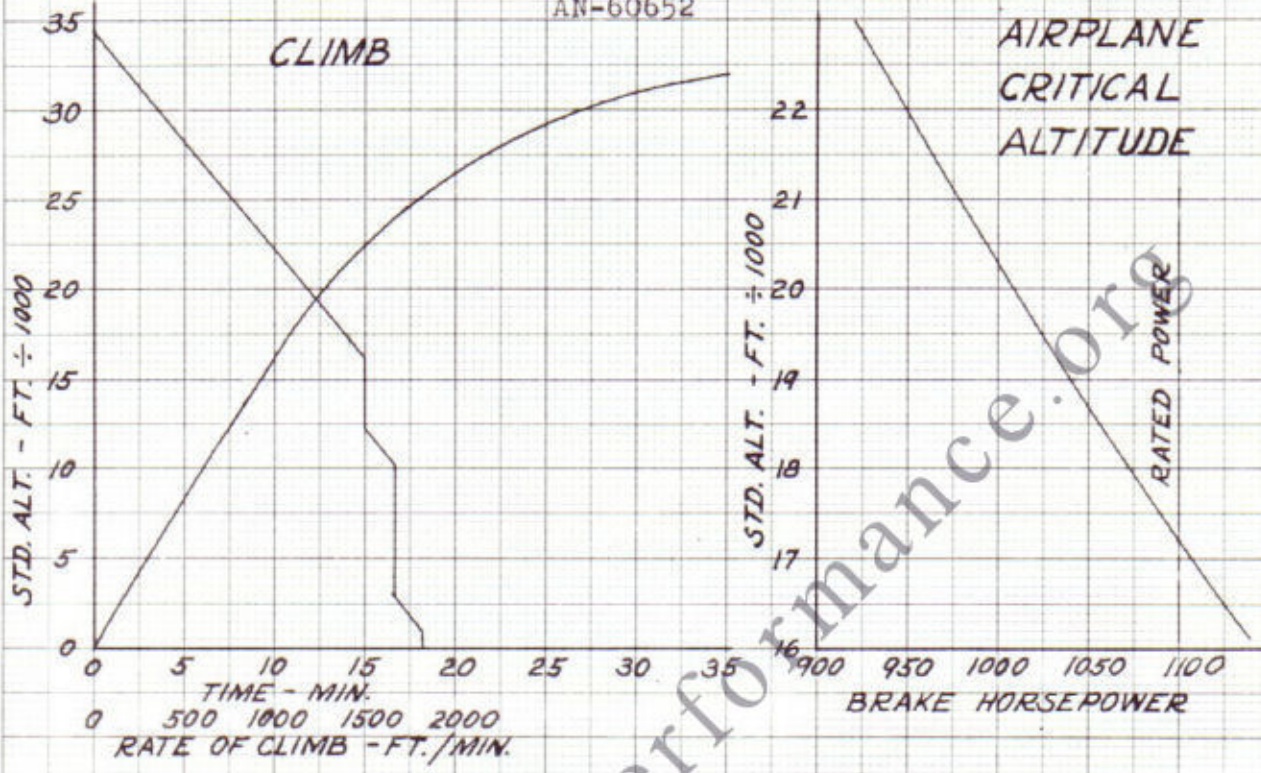

MAXIMUM SPEED AT AIRPLANE CRITICAL ALTITUDE - 17,200 FT.


AIRSPEED INDICATOR CALIBRATION

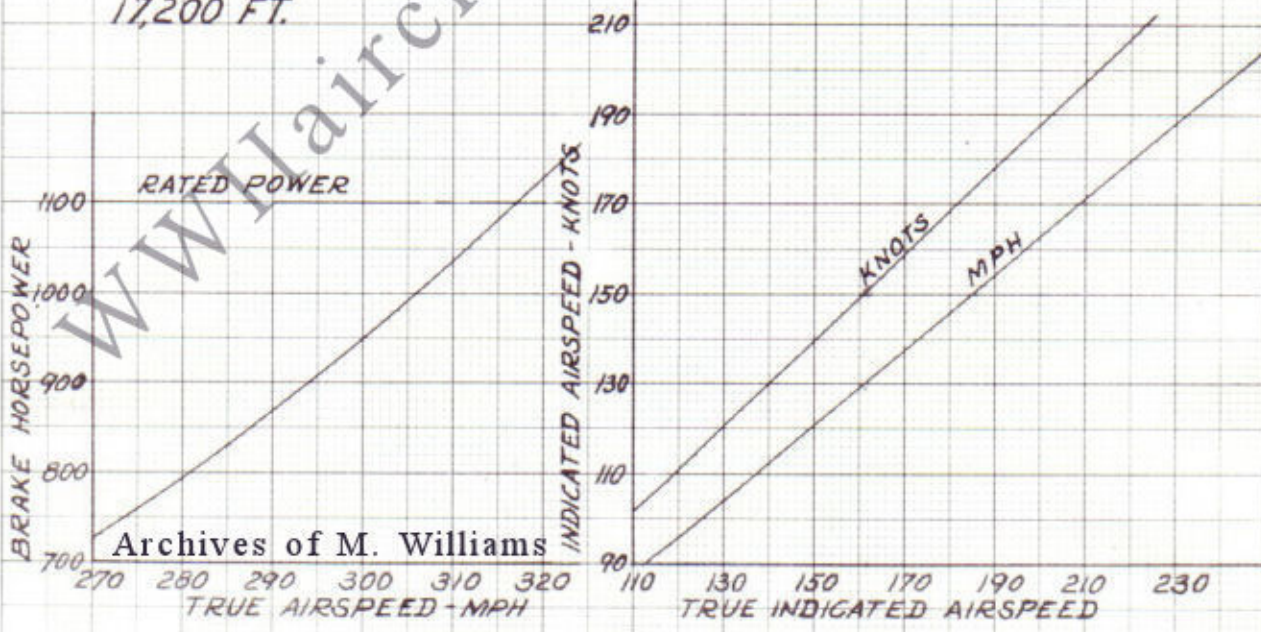

Archives of M. Williams

MODEL F4F-4 AIRPLANE No. 02135
 BHP_{req.} vs. TRUE AIRSPEED AT 10,000 FT. -
 WITH AND WITHOUT AUXILIARY DROPPABLE
 50 GAL. WING TANKS

AN-60653

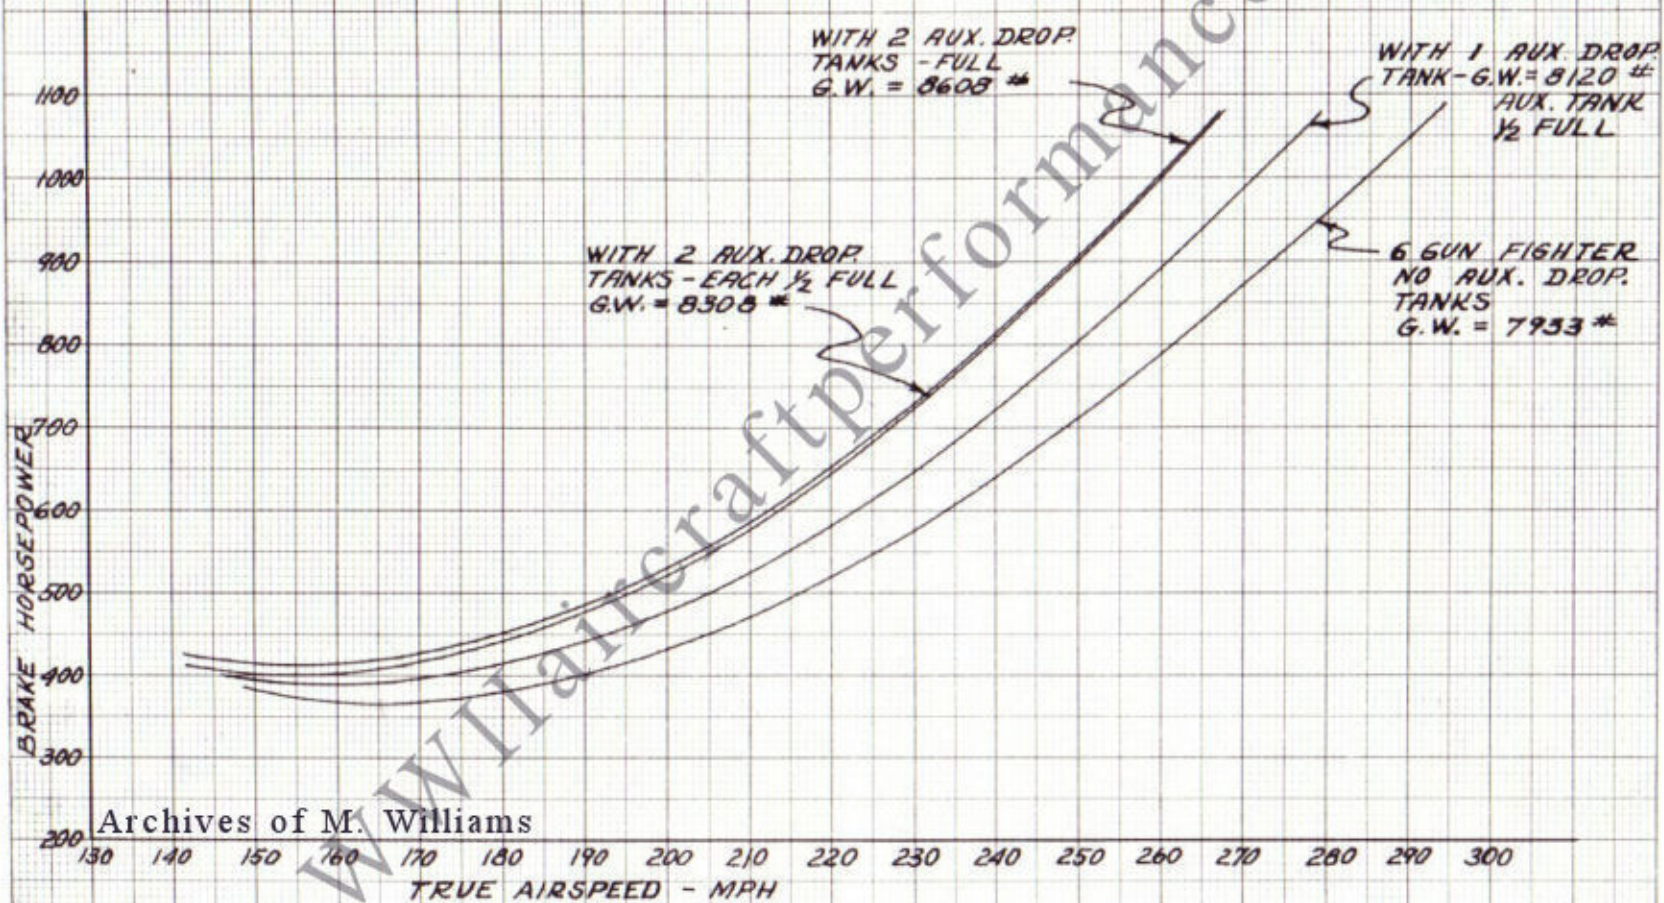

Archives of M. Williams